


VALVE POSITION



- 1 - Filling Valve
- 2 - Gaseous Phase Valve
- 3 - Liquid Phase valve
- 4 - Level Gauge
- 5 - Safety Valve

CAPACITY (Ltr.)	MANTLE	LENGHT A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	WEIGHT (kg)
490	0	660	80	-	-	-	-	80	185
990	1	1055	233,5	-	-	-	-	100	270
1650	1	1610	460	100	700	200	500	100	360
2700	1	2500	460	90	1600	890	-	100	500
3600	2	3200	460	150	2200	1250	-	150	630
4850	2	4280	460	790	2000	1220	1100	150	790
6400	3	5520	460 (2260)	660	3500	1115	2530	150	990
7000	3	6040	460	760	3800	1305	2700	150	1090
9150	4	7740	460	970	5000	1540	4000	150	1360
10000	5	8520	460	920	2x3000	2035	3700	150	1500
11300	5	9600	460	1450	2x3000	2130	4600	150	1680

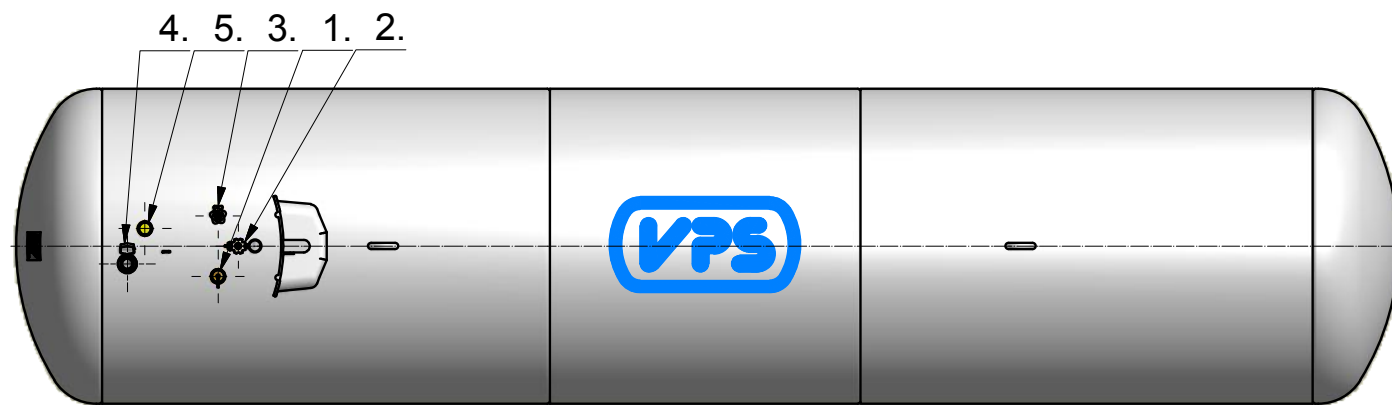